



DIMENSIONI D'INGOMBRO / Overall dimensions.
 POMPE CENTRIFUGHE MONOSTADIO
 Monostage centrifugal pumps
 SERIE / Series



pompetravaini S.p.A.
 CASTANO PRIMO (MILANO)

TCK gr. 1-2 pag.2/2

Versione **MONOBLOCCO / M** **CLOSE - COUPLED / M** construction

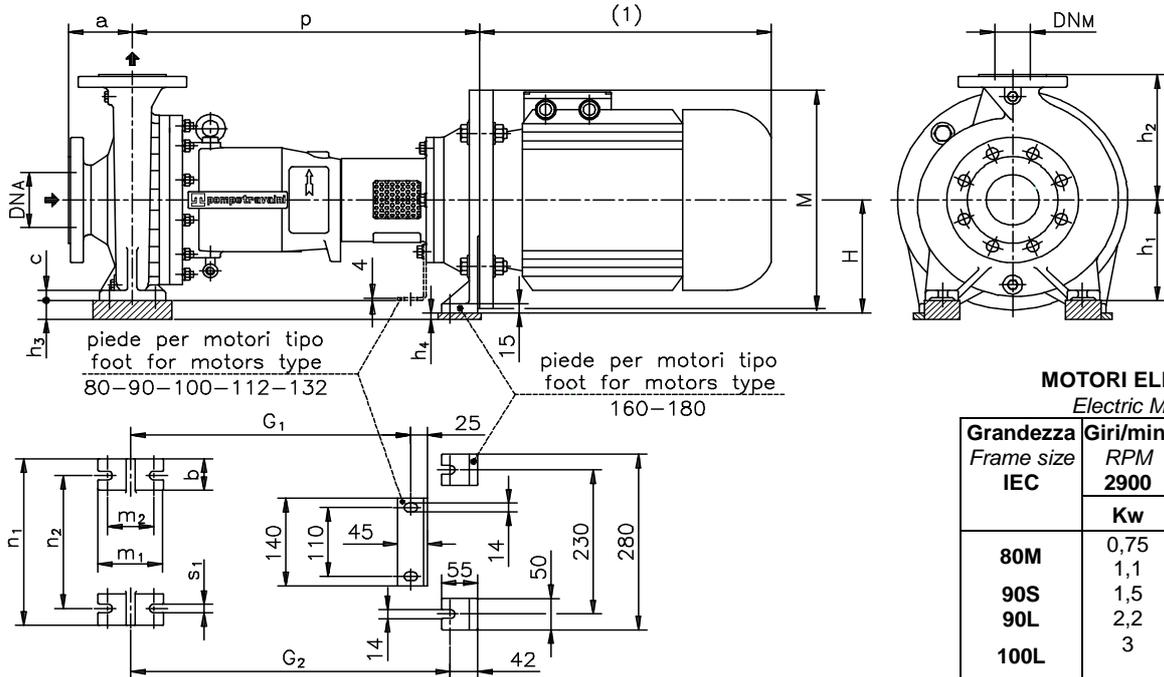

MOTORI ELETTRICI
 Electric Motors

Grandezza Frame size IEC	Giri/min. RPM	Giri/min. RPM	M
	2900	1450	
80M	0,75	0,55	200
	1,1	0,75	
90S	1,5	1,1	200
	2,2	1,5	
100L	3	2,2	250
		3	
112M	4	4	250
132S	5,5-7,5	5,5	300
		7,5	
132M		11	350
160M	11-15	15	
160L	18,5	15	350
180M	22	18,5	
180L		22	

DIMENSIONI FLANGE
 Flanges dimensions


DN _A -DN _M	D	K	P	N° fori holes
25	115	85	14	4
32	140	100	18	4
40	150	110	18	4
50	165	125	18	4
65	185	145	18	4
80	200	160	18	8
100	220	180	18	8
125	250	210	18	8

FLANGE:

Dimensioni secondo UNI 2223-2229 PN16

FLANGES:

Dimensions to UNI 2223-2229 NP16 standards

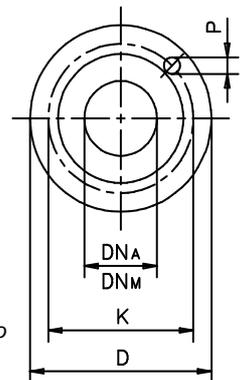

Pompa tipo Pump type	Versione MONOBLOCCO CLOSE-COUPLED construction																	
	motore 80-90 motor			motore 100-112 motor				motore 132 motor				motore 160-180 motor						
	p	G ₁	Peso Weight	p	G ₁	h ₃	Peso Weight	p	G ₁	h ₃	Peso Weight	H	h ₃	h ₄	p	G ₂	Peso Weight	
25-125	446	410	63	471	410	20	68											
25-160	446	410	69	471	410	-	74	476	410	28	77							
32-125	446	410	64	471	410	20	69	476	410	48	72	180	68	-	516	477	78	
32-160	446	410	71	471	410	-	76	476	410	28	79	180	48	-	516	477	85	
32-200	446	410	79	471	410	-	84	476	410	-	87	180	20	-	516	477	93	
32-250				580	540	-	126	601	562	-	129	200	20	-	630	585	140	
40-125	446	410	66	471	410	20	71	476	410	48	74	180	68	-	516	477	61	
40-160	446	410	73	471	410	-	78	476	410	28	81	180	48	-	516	477	65	
40-200	446	410	82	471	410	-	87	476	410	-	90	180	20	-	516	477	81	
40-250				580	540	-	127	601	562	-	130	200	20	-	630	585	141	
40-315				580	540	-	126	601	562	-	129	200	-	-	630	585	140	
50-125	446	410	74	471	410	-	80	476	410	28	83	180	48	-	516	477	59	
50-160	446	410	77	471	410	-	82	476	410	-	85	180	20	-	516	477	64	
50-200	446	410	86	471	410	-	91	476	410	-	94	180	20	-	516	477	66	
50-250				580	540	-	130	601	562	-	133	200	20	-	630	585	144	
50-315				580	540	-	127	601	562	-	130	200	-	25	630	585	141	
65-125				471	410		105	476	410		108	180	20		516	477	114	
65-160				580	540	-	118	601	562	-	121	200	40	-	630	585	132	
65-200				580	540	-	125	601	562	-	128	200	20	-	630	585	139	
65-250				580	540	-	130	601	562	-	133	200	-	-	630	585	144	
80-160				580	540	-	133	601	562	-	136	200	20	-	630	585	147	
80-200				580	540	-	138	601	562	-	141	200	20	-	630	585	152	
80-250				580	540	-	153	601	562	-	156	200	-	25	630	585	167	
100-200				580	540	-	144	601	562	-	147	200	-	-	630	585	158	

(1) Dimensioni in funzione della marca del motore elettrico installato.
 Not certified dimensions according to installed motor manufacture.

(h₃) (h₄) Spessori per allineamento motore - pompa esclusi dalla fornitura.
 Raising pads for motor - pump alignment are not supplied by pompetravaini.

RIF. - Ref.: A.Pa./C.T.
 DATA - Date: GENNAIO 2018 - January 2018

SOSTITUISCE - Replaces: 3500.100.201.01.B
 N°.: 3500.100.201.02.B



Mosca, ул. Юности, д.5, стр. 4
 Тел. (495) 988-78-29 Мегатехника.Москва
 Единый телефон сервисной службы 8(800)100-77-83

Санкт-Петербург, ул. Софийская, д.17, оф. 311
 Тел. (812) 331-70-11 Мегатехника.РФ
 Единый телефон сервисной службы 8(800)100-77-83